




片式压敏电阻器 HIP ZINC OXIDE VARISTOR


产品代码 PRODUCT CODE

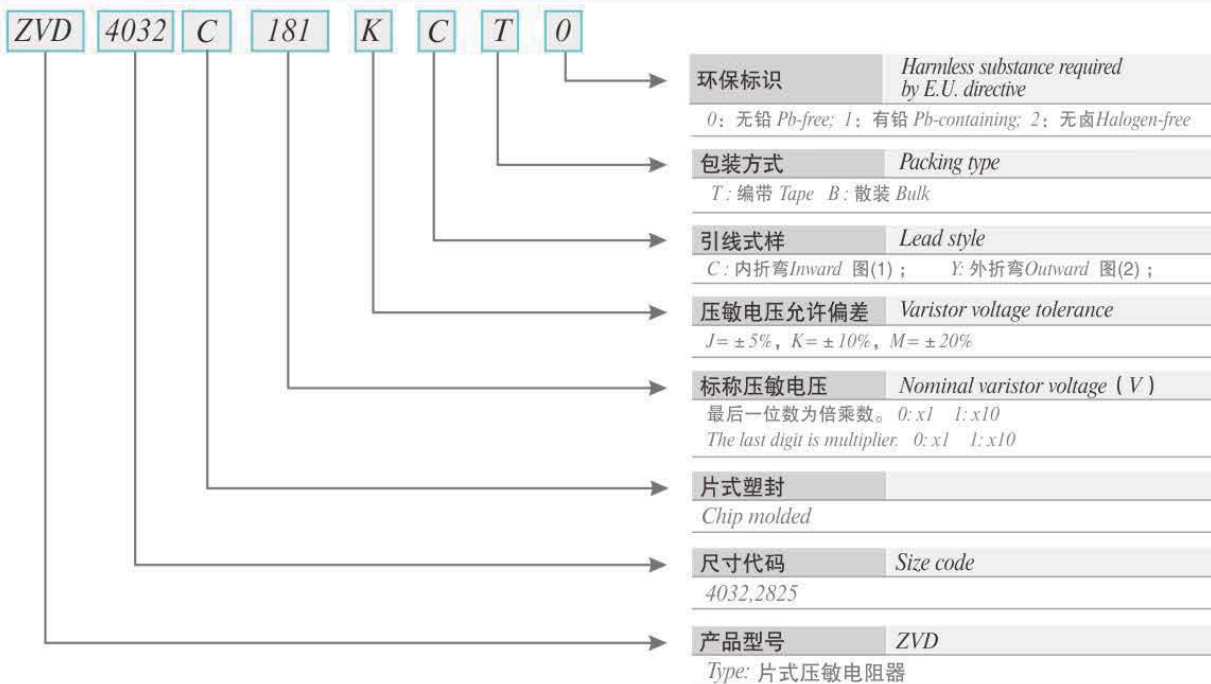

外形结构尺寸 STRUCTURE AND DIMENSION

回 产品内折弯(C型)外形及尺寸图 (图1)

➤ Fig.1 Structure and dimension of inward(C style) Chip Zinc Oxide Varistor

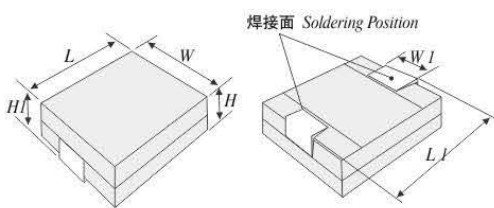


尺寸 DIM 代码 Size Code	长度 Length (mm)		宽度 Width (mm)		高度 Height (mm)	
	L	L1	W	W1	H	HI
4032C	10.2±0.1	11.5±0.4	8.3±0.1	3.0±0.1	6.3±0.1	6.5±0.2
2825C	7.1±0.1	7.5±0.3	6.3±0.1	2.5±0.1	3.5±0.1	3.6±0.2

外形结构尺寸 STRUCTURE AND DIMENSION

产品外折弯 (Y型) 外形及尺寸图 (图2)

Fig.2 Structure and dimension of outward(Y style) Chip Zinc Oxide Varistor

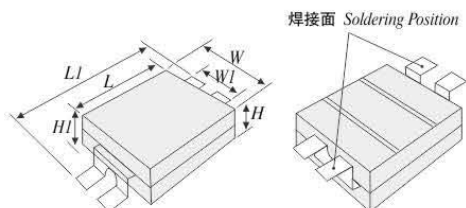

尺寸 Dim. 代码 Size code	长度 Length (mm)		宽度 Width (mm)		高度 Height (mm)	
	L	L1	W	W1	H	HI
2825Y	7.1±0.1	10.8±0.3	6.3±0.1	2.5±0.1	3.0±0.1	3.1±0.2



片式压敏电阻器 HIP ZINC OXIDE VARISTOR

4032C型片式压敏电阻器额定值
Parameter of type 4032C chip zinc oxide varistor

型号规格 Part No.	压敏电压 Varistor voltage	最大允许 工作电压 Maximum operating voltage		最大限制 电压 Maximum clamping voltage		通流容量 Withstanding surge current 8/20 μ S (A)		额定功率 Rated power	能量耐量 Energy		脉冲电流 Pulse current I_p (A)			电容量 (参考值) Capacitance (reference)
		V (V)	AC (V)	DC (V)	Vc (V)	Ip (A)	1 time		2 time	W	2ms (J)	10/1000 μ S	2ms	
ZVD4032C180	18(16-20)	11	14	36	1	250	125	0.01	0.8	1.1	9	12.6	125	3500
ZVD4032C220	22	14	18	43					2800					
ZVD4032C270	27	17	22	53					2000					
ZVD4032C330	33	20	26	65					1600					
ZVD4032C390	39	25	31	77					1350					
ZVD4032C470	47	30	38	93					1150					
ZVD4032C560	56	35	45	110					950					
ZVD4032C680	68	40	56	135					700					
ZVD4032C820	82	50	65	135					550					
ZVD4032C101	100	60	85	165					500					
ZVD4032C121	120	75	100	200					450					
ZVD4032C151	150	95	125	250					350					
ZVD2825C181	180	114	150	317					280					
ZVD4032C201	200	130	170	340					250					
ZVD4032C221	220	140	180	360					250					
ZVD4032C241	240	150	200	395					200					
ZVD4032C271	270	175	225	455	170									
ZVD4032C301	300	190	250	523	155									
ZVD4032C331	330	210	276	572	140									
ZVD4032C361	360	230	300	595	130									
ZVD4032C391	390	250	320	650	130									
ZVD4032C431	430	275	350	710	110									
ZVD4032C471	470	300	385	775	100									
ZVD4032C511	510	320	430	845	38									
ZVD4032D561	560	356	468	925	35									
ZVD4032D621	620	385	505	1025	30									
ZVD4032D681	680	420	565	1120	25									
ZVD4032D751	750	460	615	1240	20									